

NTC Thermistor : JPTG Series



Glass Encapsulated Type for Temperature Sensing/Compensation

■ Features


1. RoHS compliant
2. Glass-encapsulated and heat-resistive
3. Body size: $\varnothing 1.2 \sim 2.5 \text{ mm}$
4. Operating temperature range: $-40^{\circ}\text{C} \sim +250^{\circ}\text{C}$
5. Agency recognition: UL / cUL



■ Recommended Applications

1. Home appliances
2. Automotive electronics

■ Structure and Dimensions

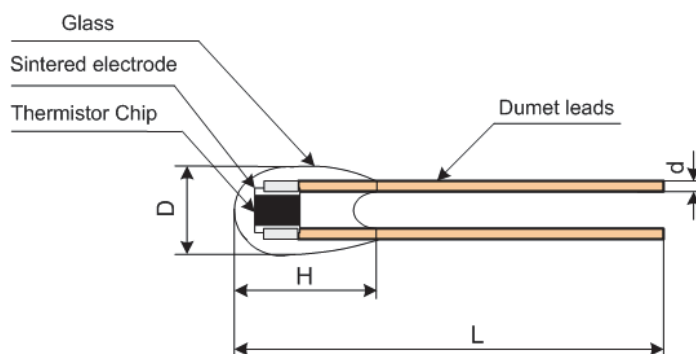

(Unit: mm)

Series	D	H	L	d
JPTGA	2.5 ± 0.2	3.8 ± 0.5	≥ 40	0.30 ± 0.02
JPTGB	2.0 ± 0.2	3.8 ± 0.5	≥ 40	0.30 ± 0.02
JPTGC	1.6 ± 0.2	3.2 ± 0.5	≥ 40	0.25 ± 0.02
JPTGD	1.2 ± 0.2	2.4 ± 0.5	≥ 40	0.20 ± 0.02

NTC Thermistor : JPTG Series



Glass Encapsulated Type for Temperature Sensing/Compensation

■ Electrical Characteristics

Part No.	Zero Power Resistance (KΩ)	B Value (K)	RT Curve --	Max. Power Dissipation at 25°C P _{max} (mW)	Dissipation Factor α(mW/°C)	Thermal Time Constant τ (Sec.)	Operating Temperature Range T _L ~T _U (°C)	Safety Approvals	
								UL	cUL
JPTG*A503F3993DA6	R100=3.3K±2%	B0/100=3970±3%	A	70	Approx. 1.4	Approx. 14	-40 ~ +250	√	√
JPTG*A503F3993DA5	R100=3.3K±3%							√	√
JPTG*A503F3993DA1	R100=3.3K±5%							√	√
JPTG*A503G4013DA1	R25=50K±2%							√	√
JPTG*A503H4013DA1	R25=50K±3%							√	√
JPTG*A503J4013DA1	R25=50K±5%							√	√
JPTG*A104G4113DA1	R25=100K±2%	B100/200=4300±3%	B					√	√
JPTG*A104H4113DA1	R25=100K±3%							√	√
JPTG*A104J4113DA1	R25=100K±5%							√	√
JPTG*A104F4113DA2	R200=0.55K±2%							√	√
JPTG*A104F4113DA3	R200=0.55K±3%							√	√
JPTG*A104F4113DA5	R200=0.55K±5%							√	√
JPTG*A103G39HAD	R25=10K±2%	B25/85= 3975±1.5%	C	√	√				
JPTG*A103H39HAD	R25=10K±3%			√	√				
JPTG*A103J39HAD	R25=10K±5%			√	√				

Note 1: Special specifications are available upon request.


Note 2: UL/cUL File No:

NTC Thermistor : JPTG Series



Glass Encapsulated Type for Temperature Sensing/Compensation

Max. Power Dissipation Derating Curve

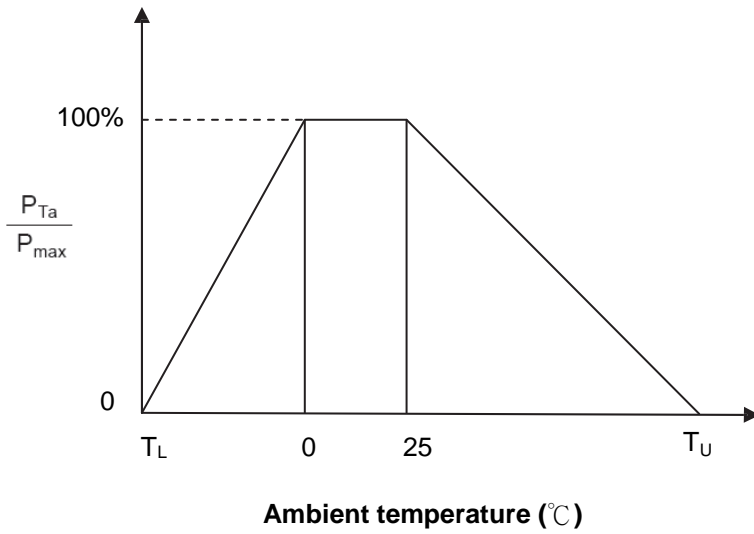

T_U : Maximum operating temperature (°C)
 T_L : Minimum operating temperature (°C)


For example:

Ambient temperature (T_a) = 60°C

Maximum operating temperature (T_U) = 200°C

$$P_{Ta} = (T_U - T_a) / (T_U - 25) \times P_{max} = 80\% P_{max}$$

R-T Characteristic Curves (representative)

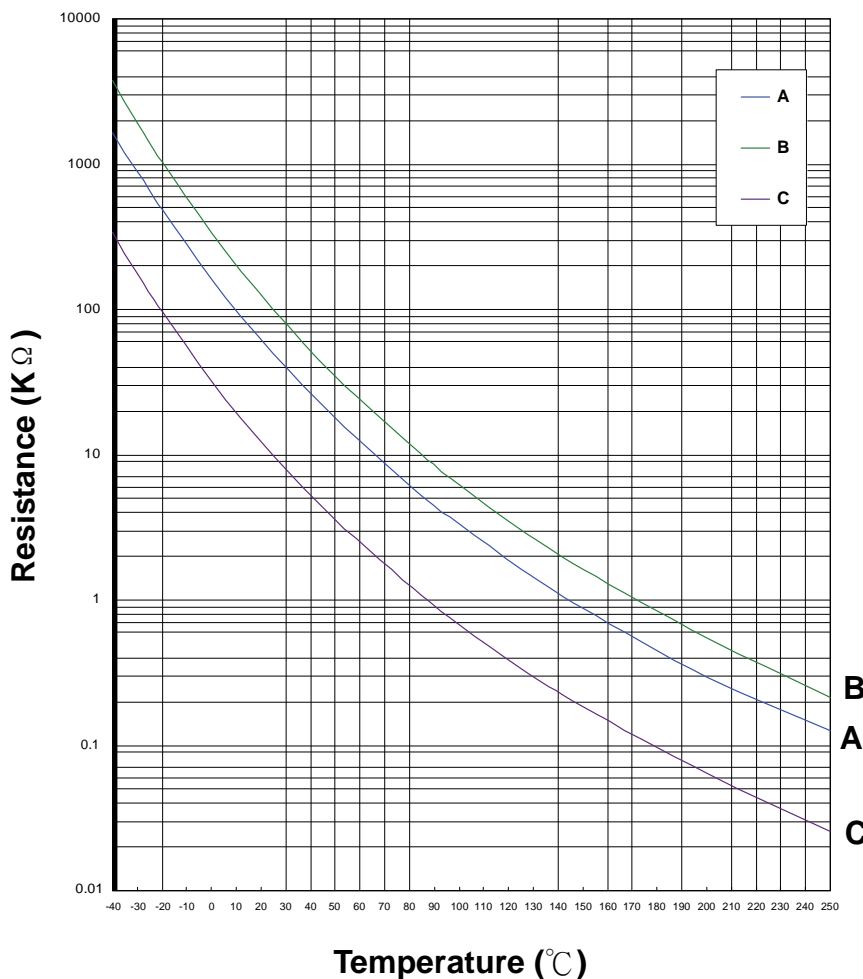

■ Reliability

Item	Standard	Test conditions / Methods	Specifications															
High Temperature Storage	IEC 60068-2-2	$T_U \pm 5^\circ\text{C}$, 1000 \pm 24 hrs	No visible damage $\Delta R_{25}/R_{25}$ $\leq 5\%$															
Damp Heat, Steady State	IEC 60068-2-78	40 \pm 2 $^\circ\text{C}$, 90~95% RH, 1000 \pm 24 hrs	No visible damage $\Delta R_{25}/R_{25}$ $\leq 3\%$															
Rapid Change of Temperature	IEC 60068-2-14	The conditions shown below shall be repeated 5 cycles. <table border="1" data-bbox="491 593 1182 853"> <thead> <tr> <th>Step</th> <th>Temperature ($^\circ\text{C}$)</th> <th>Period (minutes)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>$T_L \pm 5$</td> <td>30 \pm 3</td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td>5 \pm 3</td> </tr> <tr> <td>3</td> <td>$T_U \pm 5$</td> <td>30 \pm 3</td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td>5 \pm 3</td> </tr> </tbody> </table>	Step	Temperature ($^\circ\text{C}$)	Period (minutes)	1	$T_L \pm 5$	30 \pm 3	2	Room temperature	5 \pm 3	3	$T_U \pm 5$	30 \pm 3	4	Room temperature	5 \pm 3	No visible damage $\Delta R_{25}/R_{25}$ $\leq 3\%$
Step	Temperature ($^\circ\text{C}$)	Period (minutes)																
1	$T_L \pm 5$	30 \pm 3																
2	Room temperature	5 \pm 3																
3	$T_U \pm 5$	30 \pm 3																
4	Room temperature	5 \pm 3																
Max. Power Dissipation	IEC 60539-1 4.26.3	25 \pm 5 $^\circ\text{C}$, Pmax. X 1000 \pm 24 hrs	No visible damage $\Delta R_{25}/R_{25}$ $\leq 5\%$															

■ Warehouse Storage Conditions of Products

- Storage Conditions :
 1. Storage Temperature: -10 $^\circ\text{C}$ ~ +40 $^\circ\text{C}$
 2. Relative Humidity: $\leq 75\%$ RH
 3. Keep away from corrosive atmosphere and sunlight.
- Period of Storage : 1 year